

# ORFM-MT7620-02 Product Specification

Version	Issue date	Changes	Remark
0.1	2014/3/06	Initial Version	
0.2	2014/10/3	Modify memory configuration	
0.3	2015/4/29	Update 2T2R data rate and temperature range	
0.4	2015/8/13	Update output power	

**IMPORTANT**

This document contains important Information and therefore should not be disclosed to third parties without prior written consent of ORing Industrial Networking Co. Ltd.

Signature:

Author:	Reviewed by:	Approved by:	Remarks:
Isaac Chang			

## 1. Introduction

ORFM-MT7620-02 module is designed for easy-design-in low cost and suitable for Wi-Fi applications. The module can support WAN, LAN, UART, I2C, SPI, I2S, SDXC and GPIO interfaces and work for 2T2R mode.

## 2. Technical specification

Items		Specification																																																									
Supported Standard and Protocol		IEEE 802.11n, IEEE 802.11g, IEEE 802.11b, IEEE 802.3, IEEE 802.3u, CSMA/CA, CSMA/CD, TCP/IP, DHCP, ICMP, NAT, PPPoE																																																									
Dimension		35*30 mm																																																									
Power consumption		< 350mA																																																									
Operating Temperature Range		-30 ~ 70 deg. C																																																									
Storage Temperature Range		-40 ~ 85 deg. C																																																									
	WAN Port	one 10/100M adaptive RJ45 port																																																									
	LAN Port	one 10/100M adaptive RJ45 port																																																									
RF Parameters	Frequency Range	2.4~2.4835GHz																																																									
	Baud Rate	<p><b>1T1R :</b></p> <table border="1"> <thead> <tr> <th rowspan="3">MCS index</th> <th colspan="4">Data rate (Mbit/s)</th> </tr> <tr> <th colspan="2">20 MHz channel</th> <th colspan="2">40 MHz channel</th> </tr> <tr> <th>800ns</th> <th>400ns</th> <th>800ns</th> <th>400ns</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>6.5</td> <td>7.2</td> <td>13.5</td> <td>15</td> </tr> <tr> <td>1</td> <td>13</td> <td>14.4</td> <td>27</td> <td>30</td> </tr> <tr> <td>2</td> <td>19.5</td> <td>21.7</td> <td>40.5</td> <td>45</td> </tr> <tr> <td>3</td> <td>26</td> <td>28.9</td> <td>54</td> <td>60</td> </tr> <tr> <td>4</td> <td>39</td> <td>43.3</td> <td>81</td> <td>90</td> </tr> <tr> <td>5</td> <td>52</td> <td>57.8</td> <td>108</td> <td>120</td> </tr> <tr> <td>6</td> <td>58.5</td> <td>65</td> <td>121.5</td> <td>135</td> </tr> <tr> <td>7</td> <td>65</td> <td>72.2</td> <td>135</td> <td>150</td> </tr> </tbody> </table> <p><b>2T2R</b></p> <table border="1"> <thead> <tr> <th>MCS</th> <th>Data rate (Mbit/s)</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> </tr> </tbody> </table>	MCS index	Data rate (Mbit/s)				20 MHz channel		40 MHz channel		800ns	400ns	800ns	400ns	0	6.5	7.2	13.5	15	1	13	14.4	27	30	2	19.5	21.7	40.5	45	3	26	28.9	54	60	4	39	43.3	81	90	5	52	57.8	108	120	6	58.5	65	121.5	135	7	65	72.2	135	150	MCS	Data rate (Mbit/s)		
MCS index	Data rate (Mbit/s)																																																										
	20 MHz channel			40 MHz channel																																																							
	800ns	400ns	800ns	400ns																																																							
0	6.5	7.2	13.5	15																																																							
1	13	14.4	27	30																																																							
2	19.5	21.7	40.5	45																																																							
3	26	28.9	54	60																																																							
4	39	43.3	81	90																																																							
5	52	57.8	108	120																																																							
6	58.5	65	121.5	135																																																							
7	65	72.2	135	150																																																							
MCS	Data rate (Mbit/s)																																																										

		index	20 MHz channel		40 MHz channel	
			800ns	400ns	800ns	400ns
		8	13.00	14.40	27.00	30.00
		9	26.00	28.90	54.00	60.00
		10	39.00	43.30	81.00	90.00
		11	52.00	57.80	108.00	120.00
		12	78.00	86.70	162.00	180.00
		13	104.00	115.60	216.00	240.00
		14	117.00	130.00	243.00	270.00
		15	130.00	144.40	270.00	300.00
		IEEE 802.11g : 54/48/36/24/18/12/9/6(adaptive )				
		IEEE 802.11b : 11/5.5/2/1M(adaptive )				
	Number of Channel	13				
	Modulation Scheme	DBPSK 、DQPSK 、CCK and OFDM(BPSK/QPSK/16-QAM/64-QAM)				
	Sensitivity @ PER	150M : -68dBm@10% PER ; 130M : -68dBm@10% PER ; 108M : -68dBm@10% PER ; 54M : -72dBm@10% PER 11M : -85dBm@8% PER ; 6M : -88dBm@10% PER 1M : -90dBm@8% PER ;				
	Output Power	802.11b: 19 dBm ± 1.5dBm@11Mbps (2T2R total power) 802.11g: 17.5 dBm ± 1.5dBm@54Mbps (2T2R total power) 802.11gn HT20: 16.5 dBm ± 1.5dBm @MCS7 (2T2R total power) 802.11gn HT40: 14.5 dBm ± 1.5dBm @MCS7 (2T2R total power)				
	Antenna	Two IPEX I connectors for two external antenna( 2T2R)				
WIFI Operation Mode		Client/AP				
System Service		Virtual Server : Internal web server for browser to access				
Device Management		Area setting Restore to default factory setting Software upgrade Reboot				

	Change password
<b>WLAN Security Mode</b>	<p>OPENWEP</p> <p>SHAREDWEP</p> <p>WEPAUTO</p> <p>WPA</p> <p>WPA-PSK</p> <p>WPA2</p> <p>WPA2-PSK</p> <p>WPAPSKWPA2PSK</p> <p>WPA1WPA2(WPA and WPA2 hybrid mode)</p> <p>802.1x</p>



### 3. Software features

- Support WPS
- Support AP ( Access point ) 、 Client ( WiFi Station) mode
- **AP mode**
  - Default operation mode. In this mode, the module work as an Access Point, don't need any configuration.
  - User can use PC via RJ45 or smart phone via WiFi to login MT7620A AP mode and change the default configuration ( through browser).
- **Client mode**
  - In this mode, module is a WiFi station.

### 4. Development tool :

We provide development tool for easy connection of power, RS-232, LAN, WAN, and USB port.

## 5. Module Dimension : 35\*30 mm

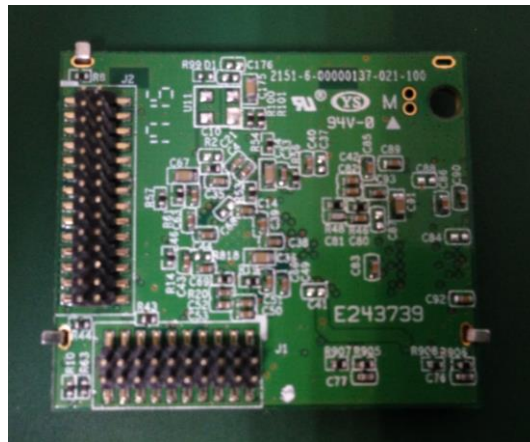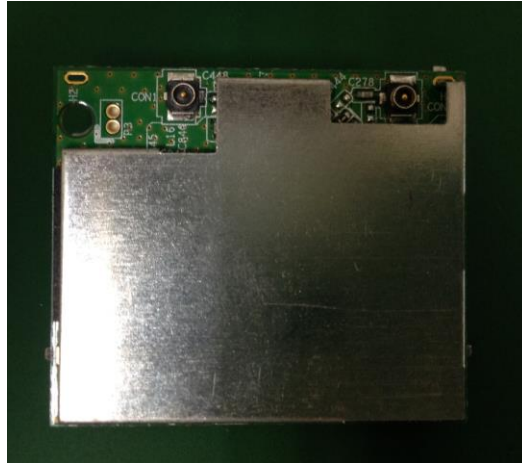

There are two 1.27mm pitch header on the bottom side of module P1 and P2.

## 6. Pin Assignment

P1 :

Multi 1	Multi 2	GPIO	Main			Main	GPIO	Multi 2	Multi 1
		GPIO50	SD_CDT	1	2	SD_CMD	GPIO51		
		GPIO52	SD_D0	3	4	SD_D3	GPIO55		
		GPIO53	SD_D1	5	6	SD_D2	GPIO54		
		GPIO48	SD_WP	7	8	SD_CLK	GPIO49		
		REFCLK	WDT_RST	9	10	POR			
		GPIO40	LINK0	11	12	GPIO0			
		GPIO41	LINK1	13	14	SPI_MISO	GPIO6		
	REFCLK	GPIO37	SPI_CS1	15	16	UART_TX	GPIO15		
		GPIO4	SPI_CLK	17	18	UART_RX	GPIO16		
		GPIO42	LINK2	19	20	SPI_MOSI	GPIO5		

P2 :

Multi 1	Multi 2	GPIO	Main			Main	GPIO	Multi 2	Multi 1
		GPIO2	I2C_SCLK	1	2	I2C_SD	GPIO1		
			TXO3_P	3	4	RXI4_P			
			TXO3_N	5	6	RXI4_N			
RXD	PCMDTX	GPIO14	RIN	7	8	LINK4	GPIO44		
RTS_N	PCMFS	GPIO11	DTR_N	9	10	GND			
	I2SSDI	GPIO10	RXD	11	12	USB_P			
	I2SCLK	GPIO7	RTS_N	13	14	USB_N			
			3.3VD	15	16	GND			
			3.3VD	17	18	TXO4_P			
TXD	PCMCLK	GPIO12	DCD_N	19	20	TXO4_N			
	I2SWS	GPIO8	TXD	21	22	RXI3_N			
CTS_N	PCMDRX	GPIO13	DSR_N	23	24	RXI3_P			
		GPIO43	LINK3	25	26	CTS_N	GPIO9	I2SSDO	
		GPO72	WLAN_LED	27	28	1.8VD			

**P1 :**

<b>Pin #</b>	<b>Function</b>	<b>Direction</b>	<b>Description</b>
1	SD_CDT	In	SDXC Card Detect
2	SD_CMD	Out	SDXC Command
3	SD_D0	In/Out	SDXC Data0
4	SD_D3	In/Out	SDXC Data3
5	SD_D1	In/Out	SDXC Data1
6	SD_D2	In/Out	SDXC Data2
7	SD_WP	In	SDXC Write Protect
8	SD_CLK	Out	SDXC Clock
9	WDT_RST	Out	Watchdog timeout reset, can be configured as ref clock output
10	POR	In	Power on reset input, low active
11	LINK0	Out	Link LED for port 0
12	GPIO0	Out	GPIO0 or WPS push button
13	LINK1	In/Out	Link LED for port 1
14	SPI_MISO	In	SPI MISO signal
15	SPI_CS1	Out	SPI chip select signal 1
16	UART_TX	A	Console UART TXD signal
17	SPI_CLK	Out	SPI clock output
18	UART_RX	A	Console UART RXD signal
19	LINK2	Out	Link LED for port 2
20	SPI_MOSI	Out	SPI MOSI signal

**P2 :**

<b>Pin #</b>	<b>Function</b>	<b>Direction</b>	<b>Description</b>
1	I2C_SCLK	In/Out	I2C Clock signal
2	I2C_SD	In/Out	I2C Data signal
3	TXO3_P	A	Tx positive for port 3
4	RXI4_P	A	Rx positive for port 4
5	TXO3_N	A	Tx negative for port 3
6	RXI4_N	A	Rx negative for port 4
7	RIN		Full UART RIN signal
8	LINK4	Out	Link LED for port 4

9	DTR_N		Full UART DTR signal
10	GND		Power ground
11	RXD		Full UART RXD signal
12	USB_P	In/Out	USB signal positive
13	RTS_N		Full UART RTS_N signal
14	USB_N	In/Out	USB signal negative
15	3.3VD	Power In	3.3V input
16	GND		Power ground
17	3.3VD	Power In	3.3V input
18	TXO4_P	A	Tx positive for port 4
19	DCD_N		Full UART DCD_N signal
20	TXO4_N	A	Tx negative for port 4
21	TXD	Out	Full UART TXD
22	RXI3_N	A	Rx negative for port 3
23	DSR_N	In/Out	Full UART DSR_N signal
24	RXI3_P	A	Rx positive for port 3
25	LINK3	Out	Link LED for port 3
26	CTS_N		Full UART CTS_N signal
27	WLAN_LED	Out	WLAN LED output, active low
28	1.8VD	Power input	1.8V input

## 7. Memory configuration

Depending on customer's request, the module can be shipped with following configuration :


Flash size : 2MB, 4MB, 8MB, 16MB, 32MB, 64MB

DDR2 size : 64MB, 128MB

## 8. Mechanical Application Notes

1. CON0 and CON1 are IPEX1 connectors on top side
2. P1 is 2\*10 pins 1.27mm male header on bottom side for signals
3. P2 is 2\*14 pins 1.27mm male header on bottom side for signals
4. Footprint of P1, P2 is as following, the coordinate of pin1 footprint center for P1 and P2 are (29.5, 10.975) and (9.575, 1.425), Please note that this coordinate is the center of pad, not



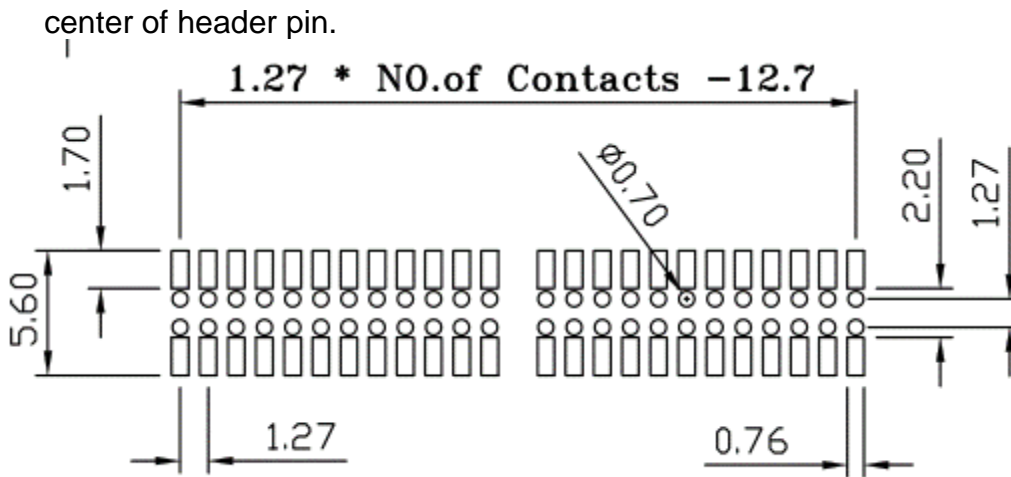

5. H1, H2, H3, H4 are slot holes used for install metal shielding cover if needed
6. D1 is diameter 2.1mm hole for screw fixing
7. D2 is diameter 2.1mm half hole for screw fixing
8. P3 is a 2 pins dip type header holes with 1.27mm pitch. Since P1 and P2 are all located on lower side, this socket can be used optionally to mount module on base PCB for balancing the force of upper side.
9. The mechanical drawing in .dxf format is available under request.

## 9.Compliance

### FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference and(2) this device must accept any interference received, including interference that may cause undesired operation.