


P


Flat cables				
#01829 Net Price: 8,65 EUR Unit: roll 100m	U	#00819 Net Price: 8,65 EUR Init: roll 100m		#04917 Net Price 6,69 EUF nit: roll 100m
Flat cable, 2C, 12/7, black, 100 m/R flat wires are covered by PVC isolation. Vire: braided copper 7x0.12mm, AWG 28 Vire's resistance: 200 Ohm/km solation resistance: 500 MOhm Vorking temperatures: -30°C up to +70°C ength: 100m	Flat cable, 2C, 12/7, white, 100 m/R Flat wires are covered by PVC isolation. Wire: braided copper 7x0.12mm, AWG 28 Wire's resistance: 200 Ohm/km Isolation resistance: 500 MOhm Working temperatures: -30°C up to +70°C Length: 100m		Flat cable, 4C, 10/6, black, 100 m/R CC Wire: CCS 6x0.1mm Length: 100m	cs
#04916 Net Price: 6,69 EUR Unit: roll 100m	U	#01808 Net Price: 12,00 EUR nit: roll 100m		#04808 Net Price 36,00 EUF nit: roll 300m
lat cable, 4C, 10/6, white, 100 m/R CCS /ire: CCS 6x0.1mm ength: 100m	Flat cable, 4C, 12/7, black, 100 m/R Flat wires are covered by PVC isolation. Wire: braided copper 7x0.12mm, AWG 28 Wire's resistance: 200 Ohm/km Isolation resistance: 500 MOhm Working temperatures: -30°C up to +70°C Length: 100m		Flat cable, 4C, 12/7, black, 300 m/R Flat wires are covered by PVC isolation. Wire: braided copper 7x0.12mm, AWG 28 Wire's resistance: 200 ohm/km Isolation resistance: 500 MOhm Working temperatures: -30°C up to +70°C Length: 300m	
#04001 Net Price: 12,00 EUR Unit: roll 100m	U	#00820 Net Price: 12,00 EUR Init: roll 100m	U.	#0480 Net Price 36,00 EUF nit: roll 300n
lat cable, 4C, 12/7, grey, 100 m/R lat wires are covered by PVC isolation. /ire: braided copper 7x0.12mm, AWG 28 /ire's resistance: 200 Ohm/km olation resistance: 500 MOhm /orking temperatures: -30°C up to +70°C ength: 100m	Flat cable, 4C, 12/7, white, 100 m/R Flat wires are covered by PVC isolation. Wire: braided copper 7x0.12mm, AWG 28 Wire's resistance: 200 Ohm/km Isolation resistance: 500 MOhm Working temperatures: -30°C up to +70°C Length: 100m		Flat cable, 4C, 12/7, white, 300 m/R Flat wires are covered by PVC isolation. Wire: braided copper 7x0.12mm, AWG 28 Wire's resistance: 200 Ohm/km Isolation resistance: 500 MOhm Working temperatures: -30°C up to +70°C Length: 300m	
#01810 Net Price: 18,90 EUR Unit: roll 100m	U	#00822 Net Price: 18,90 EUR Init: roll 100m	U.	#0181 Net Price 24,10 EUF nit: roll 100r
Lat cable, 6C, 12/7, black, 100 m/R at wires are covered by PVC isolation. ire: braided copper 7x0.12mm, AWG 28 ire's resistance: 200 Ohm/km olation resistance: 500 MOhm orking temperatures: -30°C up to +70°C ength: 100m	Flat cable, 6C, 12/7, white, 100 m/R Flat wires are covered by PVC isolation. Wire: braided copper 7x0.12mm, AWG 28 Wire's resistance: 200 Ohm/km Isolation resistance: 500 MOhm Working temperatures: -30°C up to +70°C Length: 100m		Flat cable, 8C, 12/7, black, 100 m/R Flat wires are covered by PVC isolation. Wire: braided copper 7x0.12mm, AWG 28 Wire's resistance: 200 Ohm/km Isolation resistance: 500 MOhm Working temperatures: -30°C up to +70°C Length: 100m	
#00823 Net Price: 24,10 EUR Unit: roll 100m				
Lat cable, 8C, 12/7, white, 100 m/R at wires are covered by PVC isolation. Vire: braided copper 7x0.12mm, AWG 28 fire's resistance: 200 Ohm/km olation resistance: 500 MOhm forking temperatures: -30°C up to +70°C ength: 100m				






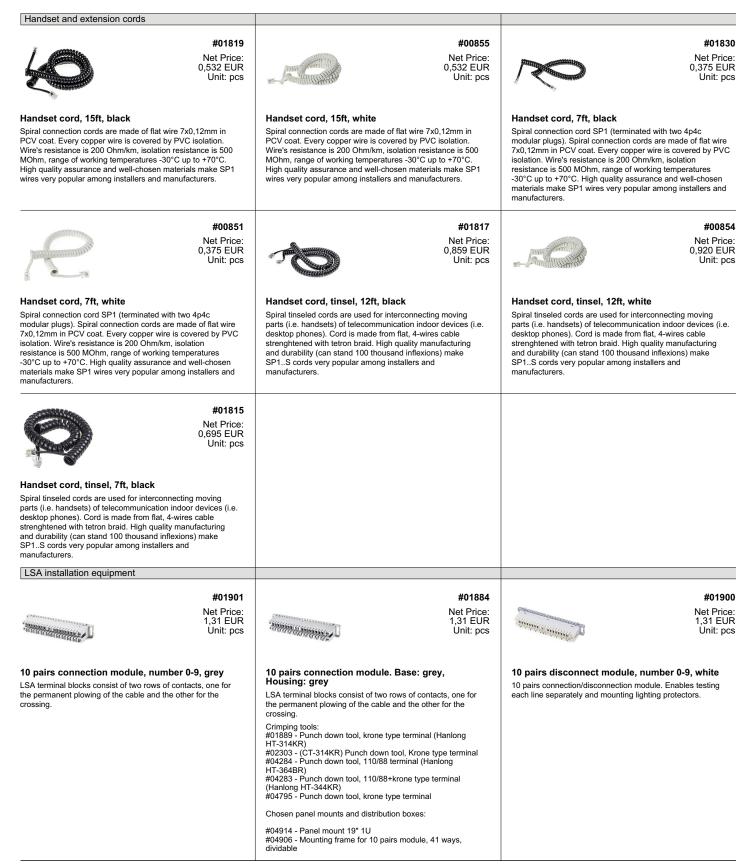

Constant of the second se	ntacts, one for ther for the al (Hanlong e type terminal Hanlong e terminal al	Mounting frame 1x10 pairs module	#07816 Net Price: 0,440 EUR Unit: pcs	Mounting frame for 10 pairs module, 3 w	#04753 Net Price: 1,43 EUR Unit: pcs
000000	#01902 Net Price: 2,25 EUR Unit: pcs	000000000000000000000000000000000000000	#04752 Net Price: 4,50 EUR Unit: pcs		#04906 Net Price: 20,70 EUR Unit: pcs
Mounting frame for 10 pairs module,	5 ways	Mounting frame for 10 pairs modul	e, 10 ways	Mounting frame for 10 pairs module, 41 dividable Allows seperating (by breaking off) any required r mounting brackets. Material: stainless steel sheet, 0.75 mm thick Lacquer cladding: no	•
Panel mount 19" 1U, 60 ways Panels of telephone connectors are made steel. They have appropriate profiling allowing mounting of all types of telephone connectors Width: 483mm Height: 44mm Depth: 81mm Weight: 0.30kg Material: stainless steel sheet, 0.75mm thick Lacquer cladding: no	g for "push-fit"	Panel mount 19" 3U, 150 ways Panel mount 19" 3U, 150 ways The panels of telephone connectors are masteel. They have appropriate profiling allowin mounting of all types of telephone connector Width: 483mm Height: 133mm Depth: 70mm Weight: 0.60kg Material: stainless steel sheet, 1.00mm thic holders	ng for "push-fit" vrs.	Panel mount 19" 3U, 150 ways, black The panels of telephone connectors are made of steel. They have appropriate profiling allowing for mounting of all types of telephone connectors.	
Distribution box, 10 pairs, outdoor Water and dust resistance: compliant with IP of the box enables installation in the terminal with the lightning arrester magazine #01885 Water and dust resistance: compliant with IP Dimensions: 19x11.5x9 cm	box together	Distribution box, 30 pairs, indoor Height: 55mm Width: 150mm Length: 150mm	#01896 Net Price: 2,86 EUR Unit: pcs	Distribution box, 30 pairs, indoor Height: 92mm Width: 175mm Length: 165mm	#07449 Net Price: 7,91 EUR Unit: pcs
Distribution box, 30 pairs, outdoor Water and dust resistance: compliant with IP	#04787 Net Price: 8,57 EUR Unit: pcs	Distribution box, 50 pairs, indoor Height: 105mm Width: 200mm Length: 185mm	#01897 Net Price: 9,80 EUR Unit: pcs	Distribution box, 50 pairs, outdoor Water and dust resistance: compliant with IP 54 Dimensions: 195x195x85mm	#04788 Net Price: 11,60 EUR Unit: pcs

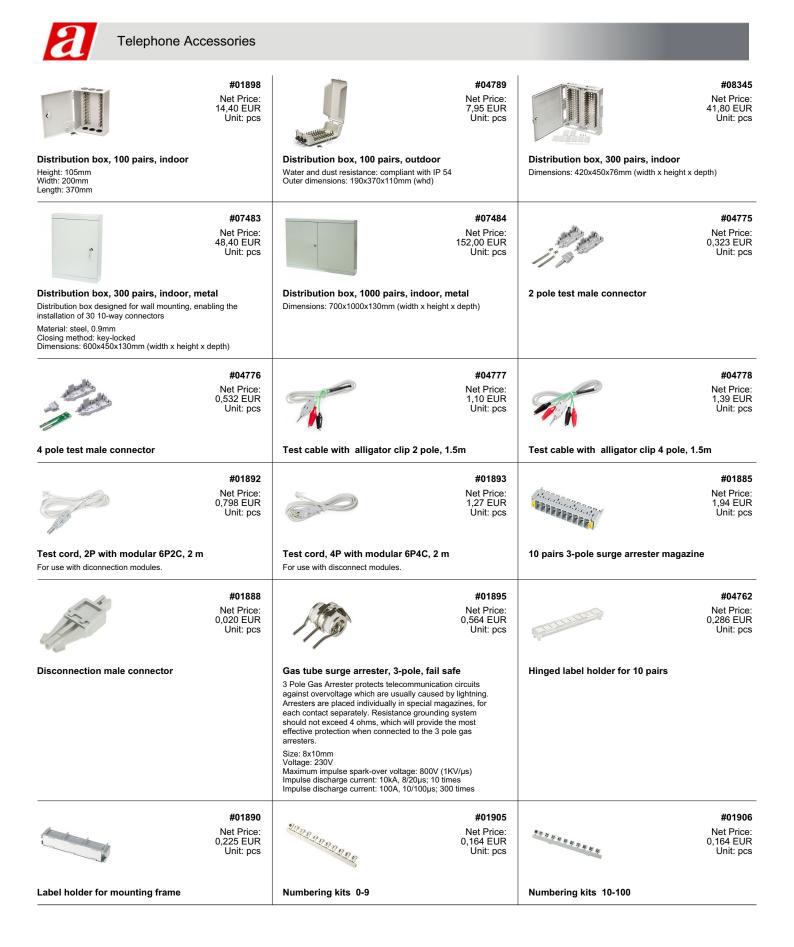











#03835 Net Price: 59 EUR Unit: pcs

#00883

Net Price:

3.78 EUR

#04913

Net Price:

0,133 EUR Unit: pcs

Unit: 100pcs

Modular male connector, 8P8C (RJ-45), cat. 6A, shielded, toolless

Modular male connectors are used for terminating wires in phone or computer installations. Shielded - for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold). Type, contacts: RJ-45, 8p8c

Type, contacts, rG-43, opec Category: 6a Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, solid and stranded Connector type: shielded, toolless

Modular male connector, 8P8C (RJ-45), round,

Modular male connectors are used for terminating wires in

of electromagnetic disturbances. The body of a male

Category: 5e Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Aud Cable type: round, solid

Modular male connector, 8P8C (RJ-45), round,

Modular male connectors are used for terminating wires in

contacts from gilded phosphor bronze (3µm layer of gold).

Category: 6 Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, solid

environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon,

phone or computer installations. Shielded type of

phosphor bronze (3µm layer of gold).

Type, contacts: RJ-45, 8p8c

Connector type: unshielded

solid, cat. 6, shielded

Type, contacts: RJ-45, 8p8c

Connector type: shielded

connector is made from polycarbon, contacts from gilded

phone or computer installations. There also exists a shielded type of male connectors used for environments with high level

1111111

solid, cat. 5e



Modular male connector, 8P8C (RJ-45), flat, solid, cat. 5e Modular male connectors are used for terminating wires in phone or computer installations. There also exists a shielded type of male connectors used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded

phosphor bronze (3µm layer of gold). Type, contacts: RJ-45, 8p8c Category: 5e Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: flat, solid

Connector type: unshielded



Modular male connector, 8P8C (RJ-45), round, solid, cat. 5e, shielded

Modular male connectors are used for terminating wires in phone or computer installations. Shielded type - used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbor contacts from gilded phosphor bronze (3µm layer of gold). Type, contacts: RJ-45, 8p8c

Type, contacts, rG-43, opc Category: 5e Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, solid Connector type: shielded



#07165 Net Price: 0,200 EUR Unit: pcs

#04919

Net Price: 0,035 EUR

Unit: pcs

Modular male connector, 8P8C (RJ-45), round, solid, cat. 6A, shielded

Modular male connectors are used for terminating wires in phone or computer installations. Shielded type - used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon contacts from gilded phosphor bronze (3µm layer of gold). Type, contacts: RJ-45, 8p8c

Category: 6A Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, solid Connector type: shielded Maximum core diameter: 1.02mm Operating temperature: -40° ÷ 125°C



#00897 Net Price: 0,104 EUR Unit: pcs

Modular male connector, 8P8C (RJ-45), round, stranded, cat. 5e, shielded

Modular male connectors are used for terminating wires in phone or computer installations. Shielded type - used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold).

Type, contacts: RJ-45, 8p8c

Type, contacts, N3-40, opec Category: 5e Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, stranded Connector type: shielded



Modular male connector, 8P8C (RJ-45), round, stranded, cat. 5e, short body

Modular male connectors are used for terminating wires in phone or computer installations. There also exists a shielded type of male connectors used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold)

Type, contacts: RJ-45, 8p8c Category: 5e Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, stranded Connector type: unshielded, short-body



#00882

Net Price:

3,58 EUR

#00884

Net Price: 0,094 EUR

Unit: pcs

Unit: 100pcs

#00880 Net Price: 3,68 EUR Unit: 100pcs

Modular male connector, 8P8C (RJ-45), flat, stranded, cat. 5e

Modular male connectors are used for terminating wires in phone or computer installations. There also exists a shielded type of male connectors used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold).

Type, contacts: RJ-45, 8p8c Category: 5e Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: flat, stranded Connector type: unshielded



#04912 Net Price: 0.092 EUR Unit: pcs

Modular male connector, 8P8C (RJ-45), round, solid, cat. 6

Modular male connectors are used for terminating wires in phone or computer installations. There also exists a shielded type of male connectors used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold).

Type, contacts: RJ-45, 8p8c Category: 6 Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, solid Connector type: unshielded



3,68 EUR Unit: 100pcs

Modular male connector, 8P8C (RJ-45), round, stranded, cat. 5e

Modular male connectors are used for terminating wires in phone or computer installations. There also exists a shielded type of male connectors used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold).

Type, contacts: RJ-45, 8p8c Category: 5e Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, stranded Connector type: unshielded



#07408 Net Price: 0,123 EUR Unit: pcs

Modular male connector, 8P8C (RJ-45), round, stranded, cat. 6, shielded

Modular male connectors are used for terminating wires in phone or computer installations. There also exists a shielded type of male connectors used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold). Type, contacts: RJ-45, 8p8c

Alterny's formation in the second sec



	#04902		#07166		#07184
The second second	Net Price: 0,109 EUR Unit: pcs		Net Price: 0,200 EUR Unit: pcs		Net Price: 0,245 EUR Unit: pcs
Modular male connector, 8P8C (RJ-45), round, stranded, cat. 6, w/insert bar		Modular male connector, 8P8C (RJ-45), round, stranded, cat. 6A, shielded		Modular male connector, cat. 8, shielded	8P8C (RJ-45), round
Modular male connectors are used for terminating wires in phone or computer installations. There also exists a shielded type of male connectors used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold). Type, contacts: RJ-45, 8p8c Category: 6 Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, stranded Connector type: unshielded		Modular male connectors are used for terminating wires in phone or computer installations. Shielded type - used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold). Type, contacts: RJ-45, 8p8c Category: 6A Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, stranded Connector type: shielded		High quality plugs designed for cat. 8 applications. New 3 pongs contacts are suitable for both solid and stranded wires. Type, contacts: RJ-45, 8p8c Category: 8 Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, solid and stranded Connector type: shielded Maximum core diameter: 1.45mm Operating temperature: -40° + 125°C Outer cable OD max: 8mm	
Constant of the second s	#00895 Net Price: 0,053 EUR Unit: pcs	Constanting Cont	#00896 Net Price: 0,053 EUR Unit: pcs		#04796 Net Price: 0,098 EUR Unit: pcs
Modular male connector, 10P100 solid	C (RJ-50), round,	Modular male connector stranded	r, 10P10C (RJ-50), round,	Modular male connector, stranded, shielded	10P10C (RJ-50), round,
The body of a male connector is made fro contacts from gilded phosphor bronze (3) Type, contacts: RJ-50, 10p10c Category: n/a Materials: policarbonate, gold-plated pho Contacts plating: 3µm Au Cable type: round, solid Connector type: unshielded	µm layer of gold).	The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold). Type, contacts: RJ-50, 10p10c Category: n/a Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, stranded Connector type: unshielded		Modular male connectors are used for terminating wires in phone or computer installations. There also exists a shielded type of male connectors used for environments with high level of electromagnetic disturbances. The body of a male connector is made from polycarbon, contacts from gilded phosphor bronze (3µm layer of gold). Type, contacts: RJ-50, 10p10c Category: n/a Materials: policarbonate, gold-plated phosphor bronze Contacts plating: 3µm Au Cable type: round, stranded Connector type: shielded	
	#04305 Net Price: 0,205 EUR Unit: pcs	E MA	#00494 Net Price: 0,020 EUR Unit: pcs		#00495 Net Price: 0,020 EUR Unit: pcs
Swivel male connector WMP 2, a modular	nti-torsion,	Cable boot w/ear, o.d. 6.0 mm, black		Cable boot w/ear, o.d. 6.0 mm, blue	
	#00496 Net Price: 0,020 EUR Unit: pcs	A AND	#00425 Net Price: 0,020 EUR Unit: pcs	P MA	#00497 Net Price: 0,020 EUR Unit: pcs
Cable boot w/ear, o.d. 6.0 mm, green		Cable boot w/ear, o.d. 6.0 mm, grey		Cable boot w/ear, o.d. 6.0 mm, red	
	#03751 Net Price: 0,020 EUR Unit: pcs		#00498 Net Price: 0,020 EUR Unit: pcs		#07185 Net Price: 0,020 EUR Unit: pcs
Cable boot w/ear, o.d. 6.0 mm, white		Cable boot w/ear, o.d. 6.0 mm, yellow		Cable boot w/ear, o.d. 8.0 mm, grey	
	#05124 Net Price: 0,020 EUR Unit: pcs		#05125 Net Price: 0,020 EUR Unit: pcs		#05126 Net Price: 0,020 EUR Unit: pcs



and a start	#05127 Net Price: 0,020 EUR Unit: pcs		#05128 Net Price: 0,020 EUR Unit: pcs	CHANNA -	#05130 Net Price: 0,020 EUR Unit: pcs
Cable boot w/inserts, grey		Cable boot w/inserts, red		Cable boot w/inserts, white	
	#05129 Net Price: 0,020 EUR Unit: pcs				
Cable boot w/inserts, yellow					
Other devices					
	#00873 Net Price: 5,91 EUR Unit: pcs				
Bell ringer with light, B type UT-7 device amplifies the phones' ring sig includes a blinking light, which switches or ringing. There is an option of choosing onl function which is a perfect solution for dea Works with any analogue phone line.	n when the phone is ly the blinking light				
Phone equipment, polish std.					
ITT #4	#00816 Net Price: 0,419 EUR Unit: pcs		#01838 Net Price: 0,177 EUR Unit: pcs	1 Am	#00874 Net Price: 0,130 EUR Unit: pcs
- U				C C C C C C C C C C C C C C C C C C C	0
Adaptor, polish male to 2 americ	can female			Connector, polish male	
Adaptor, polish male to 2 americ Splitters, couplers	tean female #00813 Net Price: 0,225 EUR Unit: pcs			Connector, polish male	#00815 Net Price: 0,327 EUR Unit: pcs ne installations use.
Splitters, couplers	#00813 Net Price: 0,225 EUR	Wall plate, polish female & americ	can female #00814 Net Price: 0,286 EUR	Coupler, R1-8, 1F/1F 8p8c Coupler with two 8p8c sockets for telepho Couplers meant for computer networks: #06492- Inline coupler, cat 5e, shielded #08317- Inline coupler, cat 5e, shielded	#00815 Net Price: 0,327 EUR Unit: pcs ne installations use.
Splitters, couplers	#00813 Net Price: 0,225 EUR Unit: pcs #00842 Net Price: 0,368 EUR	Wall plate, polish female & americ Coupler, R1-6, 1F/1F 6p6c	#00814 Wet Price: 0,286 EUR Unit: pcs #00843 Net Price: 0,450 EUR	Coupler, R1-8, 1F/1F 8p8c Coupler with two 8p8c sockets for telepho Couplers meant for computer networks: #06492- Inline coupler, cat 5e, shielded #08317- Inline coupler, cat 5e, shielded, n #04920- Cat 5e Coupler, UTP	#00815 Net Price: 0,327 EUR Unit: pcs ne installations use. nini #00844 Net Price: 0,430 EUR

Telephone Accessories			
#00847 Net Price: 0,511 EUR Unit: pcs			
Duplex adaptor, 8C, white			
Surface-mount boxes			
#04923 Net Price: 0,327 EUR Unit: pcs	#04927 Net Price: 0,389 EUR Unit: pcs	#04925 Net Price: 0,470 EUR Unit: pcs	
Surface box, 6P4C, economic. white Dimensions: 28x42x24 mm	Surface box, 6P4C, standard, white Dimensions: 50x50x21 mm	Surface dual box, 2x6P4C, economic, white	
#01849 Net Price: 1,02 EUR Unit: pcs	#04924 Net Price: 0,409 EUR Unit: pcs	#04921 Net Price: 0,491 EUR Unit: pcs	
Wall box, 2x6P4C,ABS,top entry,white	Surface box, 6P6C, economic, white	Surface box, 6P6C, standard, white	
#04922 Net Price: 0,536 EUR Unit: pcs			
Surface box, 8P8C, standard, white			
Other phone accessories #01847 Net Price: 4,34 EUR Unit: 100pcs	#01846 Net Price: 1,47 EUR Unit: 100pcs	#04905 Net Price: 2,17 EUR Unit: 100pcs	
UR connector, 100pcs/bag UR connectors enable connecting wires without the need of isolation stripping. They are filled with gel, which protects wires from corrosion. UR connectors should be used for wires with external coat up to 1.67mm in diameter and 0.4-0.9 wire diameter. Made of transparent polycarbonate with a red clamp. Purpose: connecting three wires Maximum diameter of the external coat: 1.67mm Core diameter: 0.4-0.9mm Dimensions: 19x12x8.5mm (6mm after tightening) Filling: hydrophobic gel, protecting against corrosion Packaging: cardboard, 61x63x57mm	UY connector, 100pcs/bag UY connectors enable connecting wires without the need of isolation stripping. They are filled with gel, which protects wires from corrosion. UY connectors should be used for wires with external coat up to 1.52mm in diameter and 0.4-0.7 wire diameter. Made of transparent polycarbonate with a yellow clamp. Purpose: connecting two wires Maximum diameter of the external coat: 1.52mm Core diameter: 0.4-0.7mm Dimensions: 12x8.5x8mm (6mm after tightening) Filling: hydrophobic gel, protecting against corrosion Packaging: cardboard, 55x55x55mm	UY2 connector, 100pcs/bag UY2 connectors enable connecting wires without the need of isolation stripping. They are filled with gel, which protects wires from corrosion. UY2 connectors should be used for wires with external coat up to 1.52mm in diameter and 0.4-0.9 wire diameter. Made of transparent polycarbonate with an orange clamp. Purpose: connecting two wires Maximum diameter of the external coat:1.52mm Core diameter:0.4-0.9mm Dimensions:15x10x8mm (6mm after tightening) Filling:hydrophobic gel, protecting against corrosion Temperature range: -30°C + +70°C Packaging: cardboard, 55x55x55mm	

Flat cables	. 1
Handset and extension cords	2
LSA installation equipment	2
Modular connectors, male	5
Other devices	8
Phone equipment, polish std.	8
Splitters, couplers	8
Surface-mount boxes	9
Other phone accessories	9

If you have any questions please contact our Sales Department: Head Office Opole tel. +48 (77) 455 60 76 fax +48 (77) 455 80 56 e-mail: cust@atel.com.pl

